



Industrial Freezer Sales

A division of IDS

5311 Derry Avenue Building D Agoura Hills CA 91301

Phone (818) 597-4300 Fax (818) 597-4301

www.freezerlink.com

RFC2S-4-20 Combination Refrigerator/Freezer

20 cubic feet, 1 solid door – Energy Star Qualified

Combination Unit designed to meet the most demanding requirements of scientific and laboratory applications. Cabinet construction incorporates industrial quality with a heavy-duty refrigeration system. Unique design provides both a refrigerator and freezer in a space saving design.

Standard Product Features:

- Microprocessor control with digital display (2)
- Operating temperature: Factory preset to + 4°C for the refrigerator and -20°C for the freezer, Hi / Lo visual alarm
- The exterior front, door and sides are white baked on enamel, exterior top, back and bottom are galvanized steel
- White enamel interior
- Cabinet and doors are foamed-in-place with CFC Free high density polyurethane foam insulation
- Heavy duty pivot hinges, key door locks
- Full length pull handles
- 2 epoxy coated wire shelves per door which are adjustable to 1" increments
- Perimeter, anti-condensate door opening heater wires
- Interior incandescent light activated by switches for each door
- Four casters (2 locking)
- Freezer compartment on the bottom; refrigerator compartment on top
- Refrigerant flow is controlled by thermostatic expansion valves increasing the ability of the refrigerator and freezer to meet varying load conditions
- Air-cooled condensing unit
- Automatic defrost
- Field reversible solid doors, magnetic door gasket
- **Warranties:** 18 months parts and labor, 5 year compressor (US and Canada) 18 months parts (International)
- **UL and C-UL listed.**



www.freezerlink.com



Industrial Freezer Sales

A division of IDS

5311 Derry Avenue Building D Agoura Hills CA 91301

Phone (818) 597-4300 Fax (818) 597-4301



www.freezerlink.com

RFC2S-4-20 Combination Refrigerator/Freezer

20 cubic feet, 1 solid door – Energy Star Qualified

Optional Features:

- Stainless steel drawers
- Extra shelves
- 2" sleeve with cover (refrigerator)
- Legs in lieu of casters
- Duplex outlet
- Stainless steel exterior
- Stainless steel interior
- Hi / Lo audible alarm with
- Remote contacts
- Digital monitor thermometer with alarm (field installed)
- Temperature chart recorder
- Chart paper
- 4-20 ma output

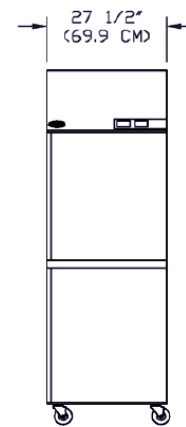


Front

SPECIFICATIONS

Int Height (in)	ea compartment 27-1/2"
Interior Width (in)	23-1/2"
Interior Depth (in)	30"
Overall Height (in)	81-1/2"
Overall Width (in)	27-1/2"
Overall Depth (in) (cm)	34-7/8"
Gross Cubage (ft.3) (m3)	20.0
Shelf Area (sq. ft.) (m2)	17

Number of Shelves	2 per door
Number of Casters	4 (standard)
Number of Legs	4 (optional)

Condensing Unit Size	1/2 HP
Refrigerant	R-404A
Electrical Characteristics	115/60/1
Cord and Plug	5-20P
Total Amp Draw	13
Crated Height (in) (cm)	84-3/4"
Crated Width (in) (cm)	37"
Crated Depth (in) (cm)	41"
Crated Weight (lbs) (kg)	475

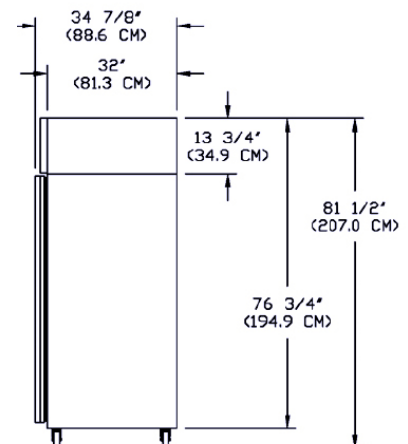

Side