



Industrial Freezer Sales

A division of IDS

5311 Derry Avenue Building D Agoura Hills CA 91301

Phone (818) 597-4300 Fax (818) 597-4301

www.freezerlink.com

SS2SDF49 Stainless Upright Freezer Overview

Advanced engineered and a commercial design incorporates the latest in cabinet, refrigeration and temperature control and monitoring features. Full size, SS each-in Freezers provide energy efficient, convenient, safe and always reliable performance for optimal storage temperature environments necessary for a wide range of laboratory, commercial and industrial cold storage applications.

Standard Product Features:

- Digital LED display microprocessor temperature controller.
- Selectable °F or °C control with visual Hi/Lo temperature alarm
- Adjustable control range from **-13°C to -30°C (-8.6°F to -22°F)**; **factory preset at -20°C (-5°F)**.
- Door open alarm and continuous product temperature display.
- Condenser cleaning reminder alarm.
- Power supply switch.
- Exterior cabinet front and sides are stainless steel, exterior cabinet top, back and bottom are galvanized steel.
- Interior cabinet liner and interior door panel are stainless steel.
- Cabinet and solid door are **foamed-in-place with CFC-free** high density polyurethane foam insulation.
- Heavy duty solid door(s) with pivot hinges and selfclosing operation with 90° stay open feature.
- Curved door handle(s) with recessed pocket(s) and magnetic door gaskets.
- Top mounted key door lock(s), unit comes with 2 keys.
- 4 casters (2 locking) on one and two door models, 6 casters (3 locking) on three door model.
- 4 vinyl coated wire shelves per door section.
- Perimeter anti-condensate door frame heater wires.
- Interior light, door switch activated.
- Bottom mounted air cooled condensing unit.
- Top mounted forced air cooling coil.
- Automatic defrost and condensate evaporation.
- **Warranties:** 18 month parts and labor, 5 year on the compressor (US and Canada), and 18 months parts only (International).
- UL, C-UL, ETL Sanitation, ENERGY STAR® listed.



www.freezerlink.com



Industrial Freezer Sales



A division of IDS

5311 Derry Avenue Building D Agoura Hills CA 91301

Phone (818) 597-4300 Fax (818) 597-4301

www.freezerlink.com

SS2SDF49 Overview (continued) Cabinet Dimensions

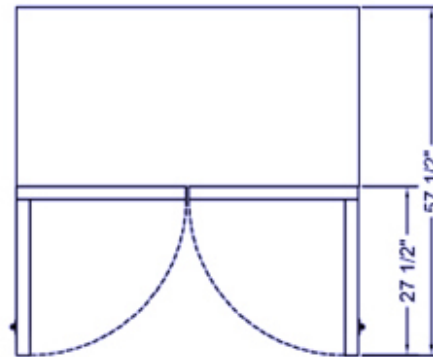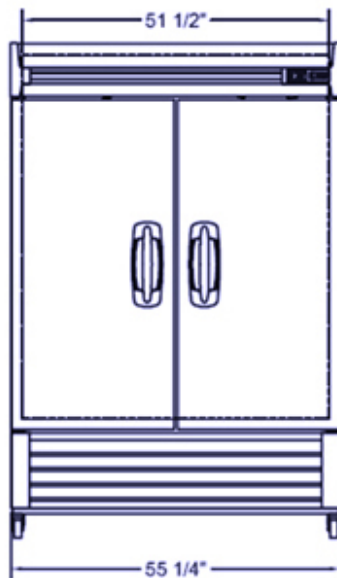

SS2SDF49 - Lab/Industrial Series
49 Cu Ft TWO SS Solid Door Freezer

SS2SDF49 Freezer Unit Specifications

Crated Weight (lbs) (kg):

483 (217)

Crated Height (in) (cm):

84-1/4 (211)

Crated Width (in) (cm):

56-3/4 (142)

Crated Depth (in) (cm):

33-1/2 (84)

Interior Height (in) (cm):

61 (153)

Interior Width (in) (cm):

51-1/2 (129)

Interior Depth (in) (cm):

27 (68)

Overall Height (in) (cm):

*83-3/4 (209)

Overall Width (in) (cm):

55-1/4 (138)

Overall Depth (in) (cm):

33 (83)

Gross Cubage (CuFt) (L):

49 (1387)

Number of Shelves:

8

Shelf Area (SqFt) (Sqm):

39 (3.6)

Number of Casters:

4

Condensing Unit Size:

3/4 HP

Refrigerant:

R-404a

Electrical Characteristics:

115/60/1

Cord & Plug Furnished:

Yes

NEMA Plug Configuration:

5-15P

Total Amp Draw:

9.5

* The overall heights shown in the table and drawings are with casters