



## Industrial Freezer Sales

A division of IDS

5311 Derry Avenue Building D Agoura Hills CA 91301

Phone (818) 597-4300 Fax (818) 597-4301

[www.freezerlink.com](http://www.freezerlink.com)

### SS2SDR49 Stainless Upright Refrigerator Overview

Advanced engineered and a commercial design incorporates the latest in cabinet, refrigeration and temperature control and monitoring features. Full size, SS each-in Refrigerators provide energy efficient, convenient, safe and always reliable performance for optimal storage temperature environments necessary for a wide range of laboratory, commercial and industrial cold storage applications.

#### Standard Product Features:

- Digital LED display microprocessor temperature controller.
- Selectable °F or °C control with visual Hi/Lo temperature alarm
- Adjustable control range from +2°C to +10°C (+35.6°F to +50°F) ; factory preset at +4°C (+39°F).
- Door open alarm and continuous product temperature display.
- Condenser cleaning reminder alarm.
- Power supply switch.
- Exterior cabinet front and sides are stainless steel, exterior cabinet top, back and bottom are galvanized steel.
- Interior cabinet liner and interior door panel are stainless steel.
- Cabinet and solid door are foamed-in-place with CFC-free high density polyurethane foam insulation.
- Heavy duty solid door(s) with pivot hinges and selfclosing operation with 90° stay open feature.
- Curved door handle(s) with recessed pocket(s) and magnetic door gaskets.
- Top mounted key door lock(s), unit comes with 2 keys.
- 4 casters (2 locking) on one and two door models, 6 casters (3 locking) on three door model.
- 4 vinyl coated wire shelves per door section.
- Perimeter anti-condensate door frame heater wires.
- Interior light, door switch activated.
- Bottom mounted air cooled condensing unit.
- Top mounted forced air cooling coil.
- Automatic defrost and condensate evaporation.
- Warranties: 18 month parts and labor, 5 year on the compressor (US and Canada), and 18 months parts only (International).
- UL, C-UL, ETL Sanitation, ENERGY STAR® listed.



[www.freezerlink.com](http://www.freezerlink.com)



## Industrial Freezer Sales



A division of IDS

5311 Derry Avenue Building D Agoura Hills CA 91301

Phone (818) 597-4300 Fax (818) 597-4301

www.freezerlink.com

### SS2SDR49 Overview (continued) Cabinet Dimensions

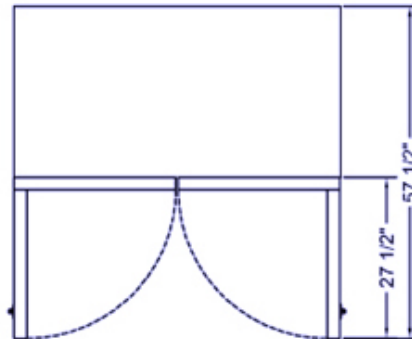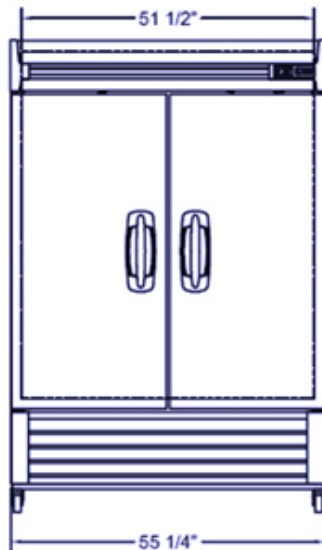

SS2SDR49 - Lab/Industrial Series 49 Cu Ft  
TWO SS Solid Door Refrigerator

### SS2SDR49 Unit Specifications

**Crated Weight (lbs) (kg):**

483 (217)

**Crated Height (in) (cm):**

84-1/4 (211)

**Crated Width (in) (cm):**

56-3/4 (142)

**Crated Depth (in) (cm):**

33-1/2 (84)

**Interior Height (in) (cm):**

61 (153)

**Interior Width (in) (cm):**

51-1/2 (129)

**Interior Depth (in) (cm):**

27 (68)

**Overall Height (in) (cm):**

\*83-3/4 (209)

**Overall Width (in) (cm):**

55-1/4 (138)

**Overall Depth (in) (cm):**

33 (83)

**Gross Cubage (CuFt) (L):**

49 (1387)

**Number of Shelves:**

8

**Shelf Area (SqFt) (Sqm):**

39 (3.6)

**Number of Casters:**

4

**Condensing Unit Size:**

3/8 HP

**Refrigerant:**

R-134a

**Electrical Characteristics:**

115/60/1

**Cord & Plug Furnished:**

Yes

**NEMA Plug Configuration:**

5-15P

**Total Amp Draw:**

7.5

\* The overall heights shown in the table and drawings are with casters