

Industrial Freezer Sales

A division of IDS

5311 Derry Avenue Building D Agoura Hills CA 91301 Phone (818) 597-4300 Fax (818) 597-4301 www.freezerlink.com

SS3SDR72 Stainless Upright Refrigerator Overview

Advanced engineered commercial design incorporates the latest in cabinet, refrigeration and temperature control and monitoring features. Full size Reach-in Refrigerators provide energy efficient, convenient, safe and reliable performance for optimal storage temperature environments necessary for a wide range of laboratory, commercial and industrial cold storage applications.

Standard Product Features:

- Digital LED display microprocessor temperature controller.
- Selectable °F or °C control with visual Hi/Lo temperature alarm
- Adjustable control range from +2°C to +10°C (+35.6°F to +50°F); factory preset at +4°C (+39°F).
- Door open alarm and continuous product temperature display.
- Condenser cleaning reminder alarm.
- Power supply switch.
- Exterior cabinet front and sides are stainless steel, exterior cabinet top, back and bottom are galvanized steel.
- Interior cabinet liner and interior door panel are stainless steel.
- Cabinet and solid door are foamed-in-place with CFC-free high density polyurethane foam insulation.
- Heavy duty solid door(s) with pivot hinges and selfclosing operation with 90° stay open feature.
- Curved door handle(s) with recessed pocket(s) and magnetic door gaskets.
- Top mounted key door lock(s), unit comes with 2 keys.
- 4 casters (2 locking) on one and two door models, 6 casters (3 locking) on three door model.
- 4 vinyl coated wire shelves per door section.
- Perimeter anti-condensate door frame heater wires.
- Interior light, door switch activated.
- Bottom mounted air cooled condensing unit.
- Top mounted forced air cooling coil.
- Automatic defrost and condensate evaporation.
- Warranties: 18 month parts and labor, 5 year on the compressor (US and Canada), and 18 months parts only (International).
- UL, C-UL, ETL Sanitation, ENERGY STAR® listed.






Industrial Freezer Sales

A division of IDS

5311 Derry Avenue Building D Agoura Hills CA 91301 Phone (818) 597-4300 Fax (818) 597-4301 www.freezerlink.com

SS3SDR72 Overview (continued) Cabinet Dimensions

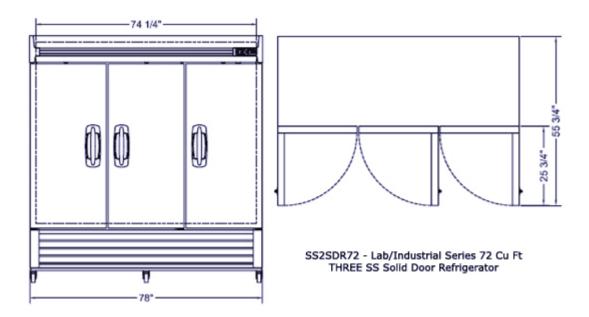

SS3SDR72 Unit Specifications

Crated Weight (lbs) (kg): Gross Cubage (CuFt) (L):

653 (294) 70 (2002)

Number of Shelves: Crated Height (in) (cm): 12

84-1/4 (211)

Crated Width (in) (cm): Shelf Area (SqFt) (Sqm):

78-3/8 (196) 56.5 (5.25)

Number of Casters: Crated Depth (in) (cm): 33-1/2 (84)

Interior Height (in) (cm): **Condensing Unit Size:**

61 (153) 1/2 HP Interior Width (in) (cm): Refrigerant:

74-1/4 (186) R-134a

Interior Depth (in) (cm): **Electrical Characteristics:**

27 (68) 115/60/1

Overall Height (in) (cm): Cord & Plug Furnished:

*83-3/4 (209)

Overall Width (in) (cm): **NEMA Plug Configuration:** 78 (195) 5-15P

Overall Depth (in) (cm): **Total Amp Draw:**

33 (83)

^{*} The overall heights shown in the table and drawings are with casters